



T-REX17® JoltScrew

Jolt head, TX drive - OutDoor XGuard & 316 Stainless Steel

Jolt Head

T15 Drive



Double Locking Thread


Locks screw in place

T-REX Teeth

Quicker & Easier to install
Cuts timber fibres to provide a stronger hold in timber

Type 17

Reduce splitting



TurboTIP
Engage within 1 second



OTC Rusticated Weatherboard	ECKO Fasteners
OTC Rusticated Weatherboard 135 x 18mm, direct fixed OTC Rusticated Weatherboard 135 x 18mm, Cavity fixed on Structural Batten	ECKO T-REX17 JoltScrew 8G x 65mm 316 S/Steel (WDJ3168G65-500) OutDoor XGuard (WDJC48G65-500)
OTC Rusticated Weatherboard 135 x 18mm, Cavity fixed on Non-structural Batten	ECKO T-REX17 JoltScrew 8G x 75mm 316 S/Steel (WDJ3168G75-500) OutDoor XGuard (WDJC48G75-500)
OTC Rusticated Weatherboard 180 x 18mm, direct fixed OTC Rusticated Weatherboard 180 x 18mm, Cavity fixed on Structural Batten	ECKO T-REX17 JoltScrew 8G x 65mm 316 S/Steel (WDJ3168G65-500) OutDoor XGuard (WDJC48G65-500)
OTC Rusticated Weatherboard 180 x 18mm, Cavity fixed on Non-structural Batten	ECKO T-REX17 JoltScrew 8G x 75mm 316 S/Steel (WDJ3168G75-500) OutDoor XGuard (WDJC48G75-500)
When Rigid wall underlays are used ensure that fixing lengths comply with minimum framing penetrations. Please refer to the OTC weatherboard installation instructions. www.otctimber.co.nz	




**OTC
Timber**
– Since 1932 –

T-REX17® JoltScrew

Jolt head, TX drive - OutDoor XGuard & 316 Stainless Steel

Jolt Head

T15 Drive



Double Locking Thread


Locks screw in place

T-REX Teeth

Quicker & Easier to install
Cuts timber fibres to provide a stronger hold in timber

Type 17

Reduce splitting



TurboTIP
Engage within 1 second



OTC Bevelback Weatherboard	ECKO Fasteners
<p>OTC Bevelback Weatherboard 135 x 18mm or 142 x 18mm, direct fixed</p> <p>OTC Bevelback Weatherboard 135 x 18mm or 142 x 18mm, Cavity fixed on Structural Batten</p>	<p>ECKO T-REX17 JoltScrew 8G x 75mm 316 S/Steel (WDJ3168G75-500) OutDoor XGuard (WDJC48G75-500)</p>
<p>OTC Bevelback Weatherboard 135 x 18mm or 142 x 18mm, Cavity fixed on Non-structural Batten</p>	<p>ECKO T-REX17 JoltScrew 8G x 90mm 316 S/Steel (WDJ3168G90-250) OutDoor XGuard (WDJC48G90-250)</p>
<p>OTC Bevelback Weatherboard 180 x 18mm or 187 x 18mm, direct fixed</p> <p>OTC Bevelback Weatherboard 180 x 18mm, or 187 x 18mm, Cavity fixed on Structural Batten</p>	<p>ECKO T-REX17 JoltScrew 8G x 75mm 316 S/Steel (WDJ3168G75-500) OutDoor XGuard (WDJC48G75-500)</p>
<p>OTC Bevelback Weatherboard 180 x 18mm, or 187 x 18mm, Cavity fixed on Non-structural Batten</p>	<p>ECKO T-REX17 JoltScrew 8G x 90mm 316 S/Steel (WDJ3168G90-250) OutDoor XGuard (WDJC48G90-250)</p>

When Rigid wall underlays are used ensure that fixing lengths comply with minimum framing penetrations.
Please refer to the OTC weatherboard installation instructions. www.otctimber.co.nz



T-REX17® JoltScrew

Jolt head, TX drive - OutDoor XGuard & 316 Stainless Steel

Jolt Head

T15 Drive



Double Locking Thread


Locks screw in place

T-REX Teeth

Quicker & Easier to install
Cuts timber fibres to provide a stronger hold in timber

Type 17

Reduce splitting



TurboTIP
Engage within 1 second



OTC Vertical Shiplap Weatherboard	ECKO Fasteners
<p>OTC Vertical Shiplap Weatherboard 135 x 18mm, direct fixed</p> <p>OTC Vertical Shiplap Weatherboard 135 x 18mm, Cavity fixed on Drained Structural Batten</p>	<p>ECKO T-REX17 JoltScrew 8G x 65mm 316 S/Steel (WDJ3168G65-500) OutDoor XGuard (WDJC48G65-500)</p>
<p>OTC Vertical Shiplap Weatherboard 135 x 18mm, Cavity fixed on Drained Non-structural Batten</p>	<p>ECKO T-REX17 JoltScrew 8G x 75mm 316 S/Steel (WDJ3168G75-500) OutDoor XGuard (WDJC48G75-500)</p>
<p>OTC Vertical Shiplap Weatherboard 180 x 18mm, direct fixed</p> <p>OTC Vertical Shiplap Weatherboard 180 x 18mm, Cavity fixed on Drained Structural Batten</p>	<p>ECKO T-REX17 JoltScrew 8G x 65mm 316 S/Steel (WDJ3168G65-500) OutDoor XGuard (WDJC48G65-500)</p>
<p>OTC Vertical Shiplap Weatherboard 180 x 18mm, Cavity fixed on Drained Non-structural Batten</p>	<p>ECKO T-REX17 JoltScrew 8G x 75mm 316 S/Steel (WDJ3168G75-500) OutDoor XGuard (WDJC48G75-500)</p>
<p>When Rigid wall underlays are used ensure that fixing lengths comply with minimum framing penetrations. Please refer to the OTC weatherboard installation instructions. www.otctimber.co.nz</p>	



**OTC
Timber**
– Since 1932 –


HAMMAHAND® Weatherboard Coil Nails

15° Jolt Head - HD Galvanised, 304 Stainless Steel

Jolt Head

Where the head is required
to be concealed

WirelessCoil

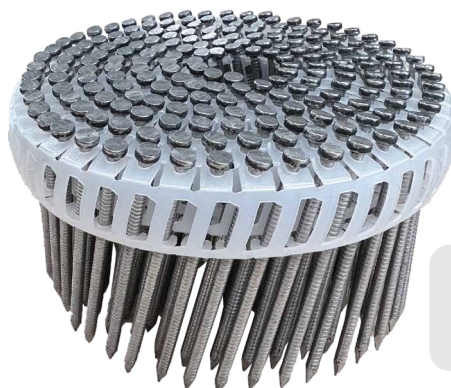

HD Galvanised & 304 Stainless Steel

Outdoor use (HD Galvanised)
Outdoor & Sea spray zone (304 S/Steel)

15°

Ring Shank

Increased holding power

OTC Rusticated Weatherboard	ECKO Fasteners
OTC Rusticated Weatherboard 135 x 18mm, direct fixed OTC Rusticated Weatherboard 135 x 18mm, Cavity fixed on Structural Batten	ECKO HAMMAHAND® Jolt Head 65 x 2.80mm 304 S/Steel (JOSS-65V8R) HD Galvanised (JOG-65V8R)
OTC Rusticated Weatherboard 135 x 18mm, Cavity fixed on Non-structural Batten	ECKO HAMMAHAND® Jolt Head 75 x 3.15mm 304 S/Steel (JOSS-75V8RPC) HD Galvanised (JOG-75V8RPC)
OTC Rusticated Weatherboard 180 x 18mm, direct fixed OTC Rusticated Weatherboard 180 x 18mm, Cavity fixed on Structural Batten	ECKO HAMMAHAND® Jolt Head 65 x 2.80mm 304 S/Steel (JOSS-65V8R) HD Galvanised (JOG-65V8R)
OTC Rusticated Weatherboard 180 x 18mm, Cavity fixed on Non-structural Batten	ECKO HAMMAHAND® Jolt Head 75 x 3.15mm 304 S/Steel (JOSS-75V8RPC) HD Galvanised (JOG-75V8RPC)
When Rigid wall underlays are used ensure that fixing lengths comply with minimum framing penetrations. <i>Please refer to the OTC weatherboard installation instructions. www.otctimber.co.nz</i>	
<ul style="list-style-type: none"> Do not overdrive jolt head nail. Set tool depth of drive so head is proud of surface of weatherboard - test to determine correct setting prior to commencing work. Board should be pressed firmly against framing members during fixing. Hand punch the nail if needed for correct depth of drive and finishing appearance. Please refer to the OTC weatherboard installation statement. 	



**OTC
Timber**
– Since 1932 –


HAMMAHAND® Weatherboard Coil Nails

15° Jolt Head - HD Galvanised, 304 Stainless Steel

Jolt Head

Where the head is required
to be concealed

WirelessCoil

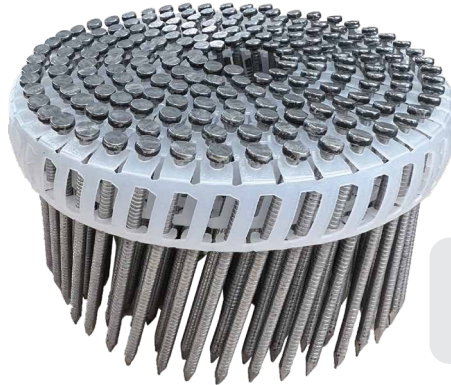

HD Galvanised & 304 Stainless Steel

Outdoor use (HD Galvanised)
Outdoor & Sea spray zone (304 S/Steel)

15°

Ring Shank

Increased holding power

OTC Bevelback Weatherboard	ECKO Fasteners
<p>OTC Bevelback Weatherboard 135 x 18mm or 142 x 18mm, direct fixed</p> <p>OTC Bevelback Weatherboard 135 x 18mm or 142 x 18mm, Cavity fixed on Structural Batten</p>	<p>ECKO HAMMAHAND® Jolt Head 75 x 3.15mm 304 S/Steel (JOSS-75V8RPC) HD Galvanised (JOG-75V8RPC)</p>
<p>OTC Bevelback Weatherboard 135 x 18mm or 142 x 18mm, Cavity fixed on Non-structural Batten</p>	<p>ECKO HAMMAHAND® Jolt Head 90 x 3.15mm 304 S/Steel (JOSS-90V8R) HD Galvanised (JOG-90V8R)</p>
<p>OTC Bevelback Weatherboard 180 x 18mm or 187 x 18mm, direct fixed</p> <p>OTC Bevelback Weatherboard 180 x 18mm, or 187 x 18mm, Cavity fixed on Structural Batten</p>	<p>ECKO HAMMAHAND® Jolt Head 75 x 3.15mm 304 S/Steel (JOSS-75V8RPC) HD Galvanised (JOG-75V8RPC)</p>
<p>OTC Bevelback Weatherboard 180 x 18mm, or 187 x 18mm, Cavity fixed on Non-structural Batten</p>	<p>ECKO HAMMAHAND® Jolt Head 90 x 3.15mm 304 S/Steel (JOSS-90V8R) HD Galvanised (JOG-90V8R)</p>
<p>When Rigid wall underlays are used ensure that fixing lengths comply with minimum framing penetrations. Please refer to the OTC weatherboard installation instructions. www.otctimber.co.nz</p>	

- Do not overdrive jolt head nail.
- Set tool depth of drive so head is proud of surface of weatherboard - test to determine correct setting prior to commencing work.
- Board should be pressed firmly against framing members during fixing.
- Hand punch the nail if needed for correct depth of drive and finishing appearance.
- Please refer to the OTC weatherboard installation statement.



**OTC
Timber**
– Since 1932 –


HAMMAHAND® Weatherboard Coil Nails

15° Jolt Head - HD Galvanised, 304 Stainless Steel

Jolt Head

Where the head is required
to be concealed

WirelessCoil

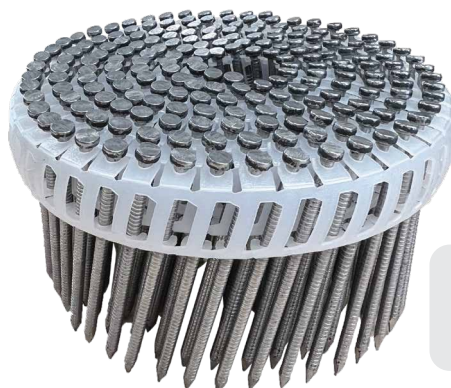

HD Galvanised & 304 Stainless Steel

Outdoor use (HD Galvanised)
Outdoor & Sea spray zone (304 S/Steel)

15°

Ring Shank

Increased holding power

OTC Vertical Shiplap Weatherboard	ECKO Fasteners
OTC Vertical Shiplap Weatherboard 135 x 18mm, direct fixed OTC Vertical Shiplap Weatherboard 135 x 18mm, Cavity fixed on Drained Structural Batten	ECKO HAMMAHAND® Jolt Head 65 x 2.80mm 304 S/Steel (JOSS-65V8R) HD Galvanised (JOG-65V8R)
OTC Vertical Shiplap Weatherboard 135 x 18mm, Cavity fixed on Drained Non-structural Batten	ECKO HAMMAHAND® Jolt Head 75 x 3.15mm 304 S/Steel (JOSS-75V8RPC) HD Galvanised (JOG-75V8RPC)
OTC Vertical Shiplap Weatherboard 180 x 18mm, direct fixed OTC Vertical Shiplap Weatherboard 180 x 18mm, Cavity fixed on Drained Structural Batten	ECKO HAMMAHAND® Jolt Head 65 x 2.80mm 304 S/Steel (JOSS-65V8R) HD Galvanised (JOG-65V8R)
OTC Vertical Shiplap Weatherboard 180 x 18mm, Cavity fixed on Drained Non-structural Batten	ECKO HAMMAHAND® Jolt Head 75 x 3.15mm 304 S/Steel (JOSS-75V8RPC) HD Galvanised (JOG-75V8RPC)
When Rigid wall underlays are used ensure that fixing lengths comply with minimum framing penetrations. Please refer to the OTC weatherboard installation instructions. www.otctimber.co.nz	
<ul style="list-style-type: none"> Do not overdrive jolt head nail. Set tool depth of drive so head is proud of surface of weatherboard - test to determine correct setting prior to commencing work. Board should be pressed firmly against framing members during fixing. Hand punch the nail if needed for correct depth of drive and finishing appearance. Please refer to the OTC weatherboard installation statement. 	